

Amana® Commercial

Project #: _____

Item #: _____



Model RCS10DSE shown

Medium Volume

Amana Commercial Microwave Model RCS10DSE

Power Output

- 1000 watts of power.
- Four power levels.

Easy to Use

- User friendly ten minute dial timer lights up for at-a-glance monitoring.
- Timer automatically resets to zero if door is opened during heating. User option allows manual reset to zero.
- See-through door and lighted interior for monitoring without opening the door.
- 1.2 cubic ft. (34 liter) capacity accommodates a 14" (356 mm) platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a commercial look.
- Constructed to withstand the foodservice environment.
- Non-removable air filter protects oven components.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- ETL Listed.

Medium Volume This category of microwave is ideal for...

Applications:

- Coffee shops
- Ethnic restaurants
- Concessions
- Dessert stations

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.



AIA File #:

Specification #:

Part No. 20154733
Updated 6/17/16
Original Instructions



© 2016 ACP, Inc.
Cedar Rapids, Iowa 52404

225 49th Ave Dr. SW Cedar Rapids, IA 52404 | 800-233-2366


| 319-368-8120

| Fax: 319-368-8198

| www.acpsolutions.com

®/™ © 2016 Amana. All rights reserved. Brand used under license.

Amana Commercial Microwave Model RCS10DSE | Medium Volume

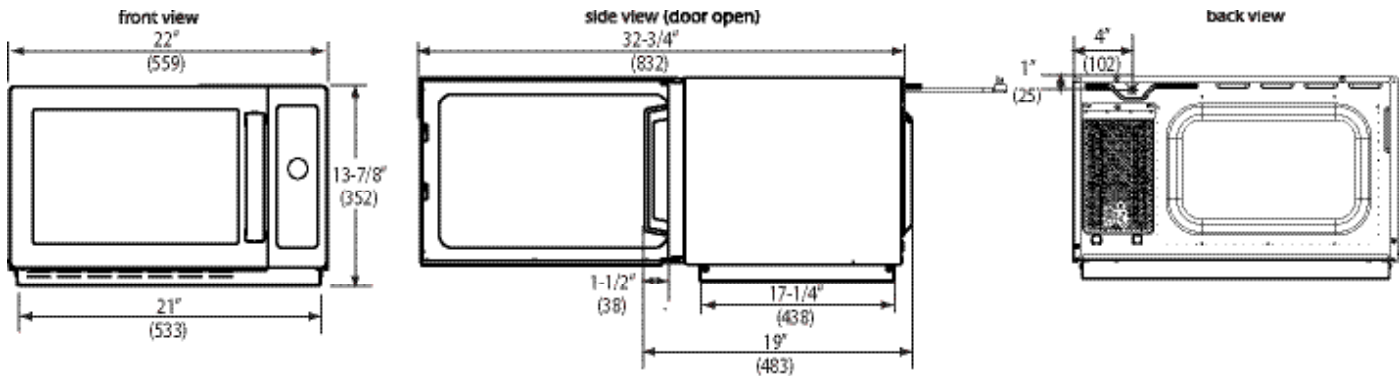

Installation Clearances - Top: 2" (51), Sides: 1" (25), Back: None

Drawings available from KCL CADlog - techs@kclcad.com

Specification #:

Specifications			
Model	RCS10DSE	UPC Code 728028129465	
Configuration	Countertop		
Control System	Dial		
Max. Cooking Time	10:00		
Power Levels	4		
Time Entry Option	Yes		
Microwave Distribution	Rotating antenna, top		
Magnetron	1		
Stackable	Yes		
Stage Cooking	1		
Interior Light	Yes		
Door Handle	Grab & Go		
Signal	End of cycle		
Exterior Dimensions	H 13 7/8" (352)	W 22" (559)	D*19" (483)
Cavity Dimensions	H 8 1/2" (216)	W 14 1/2" (368)	D 15" (381)
Door Depth	32 3/4" (832), 90°+ door open		
Usable Cavity Space	1.2 cubic ft. (34 liter)		
Exterior Finish	Stainless steel		
Interior Finish	Stainless steel		
Power Consumption	1550 W, 13 A		
Power Output**	1000 W** Microwave		
Power Source	120V, 60 Hz, 15 A single phase		
Plug Configuration / Cord	NEMA 5-15	5 ft. (1.5m)	
Frequency	2450 MHz		
Product Weight	41 lbs. (19 kg.)		
Ship weight (approx.)	47 lbs. (21 kg.)		
Shipping Carton Size	H 16 5/8" (422)	W 25 3/6" (640)	D 19 3/4" (502)
UPS Shippable	Yes		

Specifications

Commercial microwave shall have a user-friendly 10 minute dial timer with illuminated digits and an end of cycle audible signal. Timer shall automatically reset if the door is opened during heating with user option to manually reset to zero. There shall be a four power level and cooking stage. Microwave output shall be 1000 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.2 cubic ft. (34 liter) cavity shall accommodate a 14" (356 mm) platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel exterior and interior and be stackable to save counter and shelf space. The air filter shall be permanently affixed to the front of the oven. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, UL923 for safety and NSF4 for sanitation.



Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at:

www.acpsolutions.com/warranty



Service

All products are backed by the ACP, Inc. 24/7 ComServ



AIA File #:

Measurements in () are millimeters

* Includes handle

** IEC 60705 Tested

Part No. 20154733
Updated 6/17/16
Original Instructions



© 2016 ACP, Inc.
Cedar Rapids, Iowa 52404