

12 Cup Automatic Coffee Brewer

Features

12 Cup Automatic Coffee Brewer

- Brews 3.8 to 7.5 gallons (14.4 to 28.4 liters) of perfect coffee per hour.
- Model is space-saving 8.5" (21.6 cm) wide.
- Black decor construction (stainless steel optional).
- Pourover feature on all models.
- SplashGard® funnel deflects hot liquids away from the hand.
- International electrical configurations available.



CWTF15-3T

(decanters sold separately)
Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)



CWTF15-2

(decanters sold separately)
Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)



CWTF15-1

(decanters sold separate)
Dimensions: 16.8" H x 8.5" W
(42.7cm H x 21.6cm W x 45



CWTF-DV-3T

(decanters sold separately)
Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000



Easy Clear® ED-17-TL

Product No. : 30201.1001

Paper Filter Pack

Product No. : 20115.6000

Packed per case: 1,000

Dimensions: 4¹/₄" Base x 2³/₄" Sidewall

10.8 cm Base x 6.98 cm Sidewall



Easy Pour® black decanter

Product No. : 06100.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



Easy Pour® orange decanter (decaf)

Product No. : 06101.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



WX1-warmer

Product No. : 06450.6000

One position warmer



WX2-warmer

Product No. : 06310.6000

Two position warmer



Model

CWTF15

CWTF35

Agency Listing



Dimensions & Specifications



Model	Product #	Volts	Amps	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Cord Attached
CWTF15-1*	12950.6031	120	11.5	1250	3.8 gal./14.4 liter	3.9/.12	27 /12.3	Yes
CWTF15-2*	12950.6033	120	11.5	1350	3.8 gal./14.4 liter	3.9/.12	32 /14.5	Yes
CWTF15-3T*	12950.6038	120	12.5	1450	3.8 gal./14.4 liter	3.9/.12	33 /14.9	Yes
CWTF35-3T*	12950.6053	120/208	15.1	2975	7.5 gal./28.4 liter	3.9/.12	33 /14.9	No
CWTF-DV-3T*	12950.6118	120	12	1450	3.8 gal/14.4 liter	6.7 /.19	42 / 19	No
		120/208*	11.6	2410	6.5 gal/24.6 liter	6.7 /.19	42 / 19	
		120/240*	13.5	3250	7.0 gal/26.5 liter	6.7 /.19	42 / 19	

* Black Trunk and Black Plastic Funnel


Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Model 15 requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

Model 35 requires 3-wires plus ground service rated 120/208 or 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

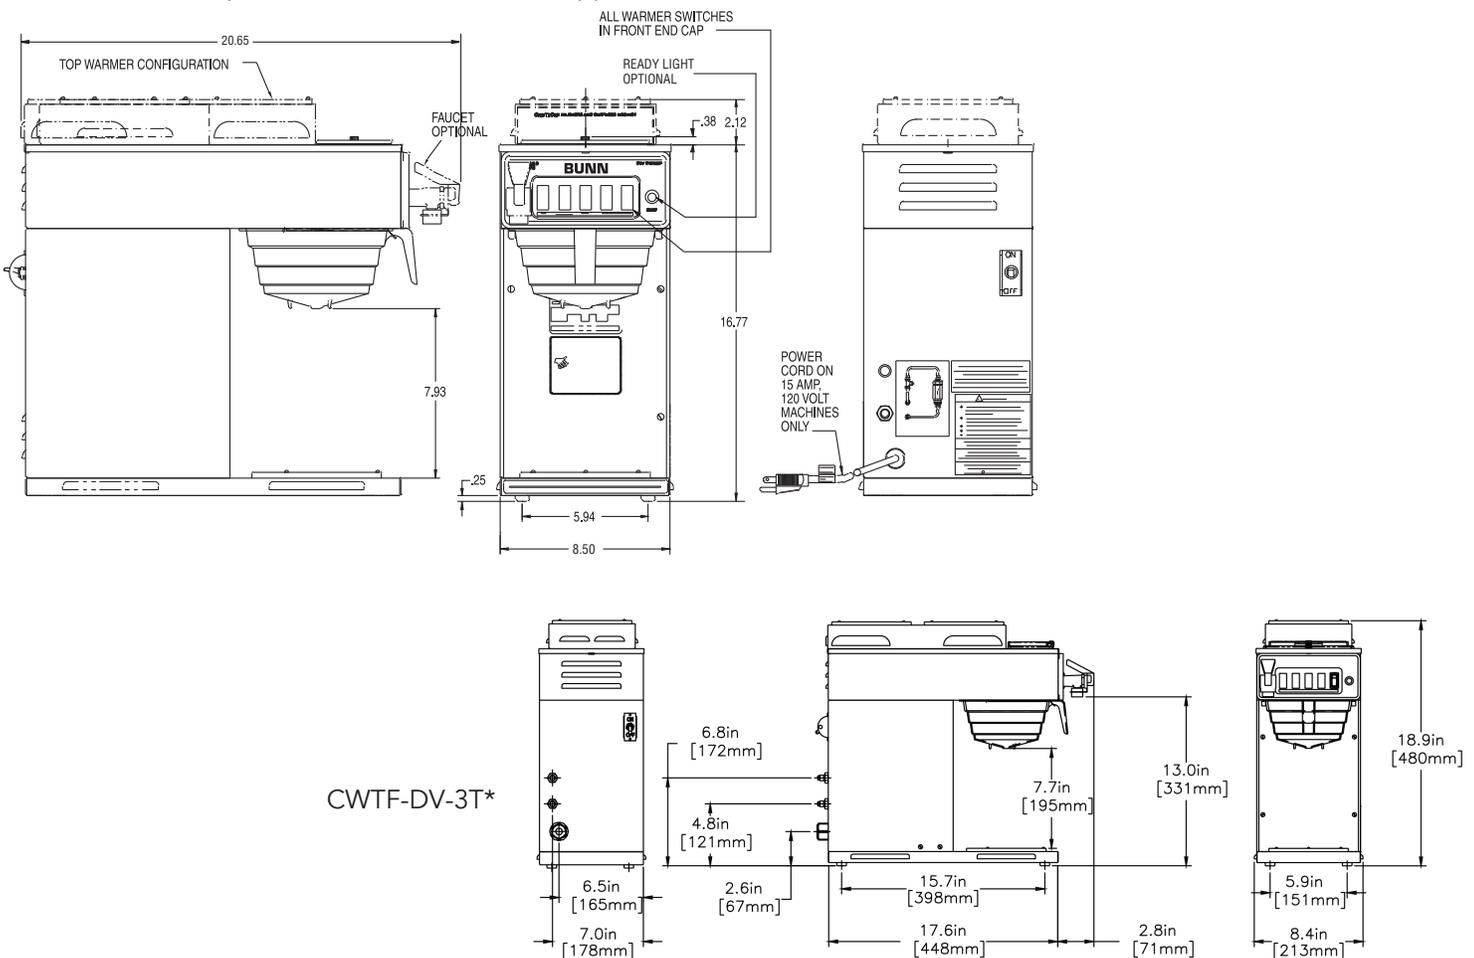

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.