

BrewWISE[®] Dual ThermoFresh[®] DBC Brewer



**Model Dual TF DBC with
1.5 gallon TF Servers**
(servers sold separately)

Dimensions: 35.7" H x 21.8" W x 20.2" D
(90.7cm H x 55.4cm W x 51.3cm D)

Features

BrewWISE[®] Brewing System with ThermoFresh[®] Servers

- Brews 16.3 to 18.9 gallons (61.7 to 71.5 litres) of perfect coffee per hour.
- Stores individual coffee recipes so operator can easily brew many varieties.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Easy pulse interface allows automatic programming of pulse routine.
- Operate any combination of BrewWISE[®] equipment error-free with wireless brewer-grinder interface through the Smart Funnel[®].
- SplashGard[®] funnel and optional funnel locks help improve safety.
- Black and stainless models available.
- ThermoFresh[®] servers are vacuum insulated to keep coffee hot and fresh for hours.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (Windows[®] compatible).



Black finish available.

Related Products

Easy Clear[®] EQHP-25L

Product No. : 39000.0002



Easy Clear[®] EQHP-25

Product No. : 39000.0005

Single/Dual Filter Pack

Product No. : 20138.0000

Packed per case: 500

Dimensions:

5 1/4" Base x 4 1/4" Sidewall

13.3 cm Base x 10.8 cm Sidewall



Multi-Hopper Grinder (MHG)

Product No.: 35600.6002

Black finish



Faucet Cover

Product No.: 07187.0001



TF Servers

Product No.: 44050.6001

• 1.5 gallon, Mechanical Gauge, Black

Product No.: 44050.6000

• 1.5 gallon, Mechanical Gauge, Stainless Steel



TF Digital Servers

Product No.: 42750.6001

• 1.5 gallon, Digital Gauge, Black

Product No.: 42750.6000

• 1.5 gallon, Digital Gauge, Stainless Steel



Model

Dual TF DBC

Agency Listing



Dimensions & Specifications



Model	Product #	Volts	Amps	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Funnel Locks
Dual TF DBC	34600.6000	120/240	27.5	6600	16.0g / 61.0L	14.6 / .39	92.5 / 41.9	Yes
Dual TF DBC*	34600.6001	120/240	27.5	6600	16.0g / 61.0L	14.6 / .39	92.5 / 41.9	Yes
Dual TF DBC	34600.6002	120/240	27.5	6600	16.0g / 61.0L	14.6 / .39	92.5 / 41.9	No
Dual TF DBC*	34600.6003	120/240	27.5	6600	16.0g / 61.0L	14.6 / .39	92.5 / 41.9	No
Dual TF DBC	34600.6004	120/208	27.4	5700	14.5g / 54.9L	14.6 / .39	92.5 / 41.9	No
Dual TF DBC*	34600.6005	120/208	27.4	5700	14.5g / 54.9L	14.6 / .39	92.5 / 41.9	No
Dual TF DBC	34600.6006	120/208	27.4	5700	14.5g / 54.9L	14.6 / .39	92.5 / 41.9	Yes
Dual TF DBC*	34600.6007	120/208	27.4	5700	14.5g / 54.9L	14.6 / .39	92.5 / 41.9	Yes
Dual TF DBC**	34600.6042	120/208-240	24/27.5	6600	54.9L / 61.0L	14.6 / .39	92.5 / 41.9	Yes
Dual TF DBC**	34600.6043	208-240 208-240	20.6-23.8 24.0-27.5	7425-9900 4950-6600	21-28g/80-107L 14-18g/53-71L	14.6/.41	92.5/ 42	Yes

This unit contains stepdown transformer for locations without neutral (120volts).

*Models have black decor


** Multiphase brewer

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Capacity: Incoming water temp of 60°F (15.5°C)

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz. (No Cord Set)

Plumbing: 20-90 psi (138-621 kPa). Supplied with 3/8" male lare itting.

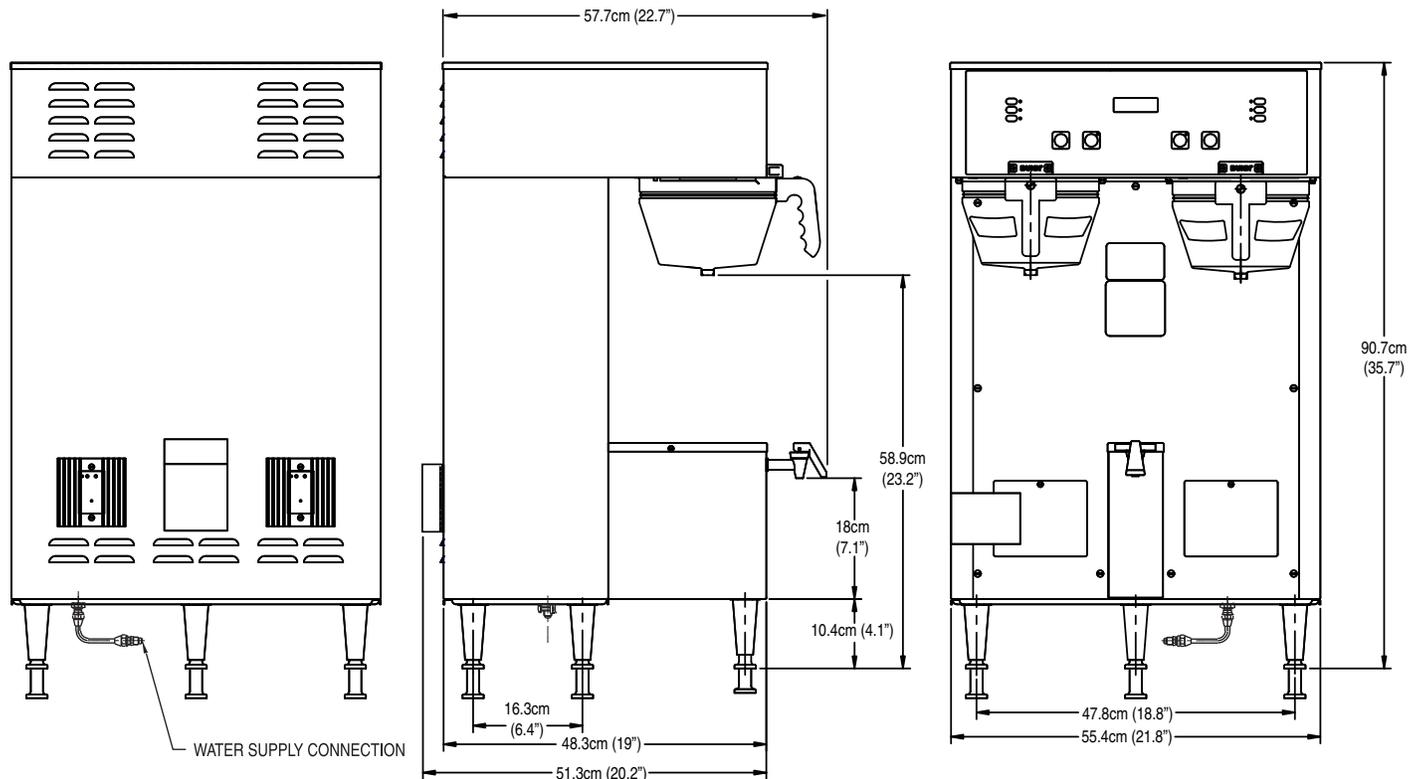

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.