

# SF24SX

*Stainless Xterior™ Freezer*

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_



Width*	Depth**	Height***	Shelves	Cold Space™	Ship Weight	Ship Cube	Cooling Capacity	Electrical
23 7/8" 607 mm	31" 788 mm	78" 1982 mm	3	24	275 lbs 125 kg	41 cu. ft 1.16 m³	1/3 HP	115V/6.2 Amp/60 Hz - Single Phase - NEMA 5-15P, Dedicated Circuit

\*\*\* Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up.

## Premium Features



ProductTemp™



Digitally Controlled



Finless Free&Clear™  
Condenser Coil



Automatic Stainless Steel  
Condensate Control System



Priority Air-Flow

## SF24SX: Designed to enhance the refrigerated storage or display experience to the highest standards of quality and performance.

### Refrigeration:

- Traditional non-removable, split forced-air refrigeration system employs R-404a refrigerant within a sealed capillary tube system.
- Condensing unit is bottom-mounted and can be accessed from the front for ease of maintenance.
- Priority, directed air flow provides optimum cooling and energy efficiency through front of unit for optimized heat exchange ventilation.
- Finless, Free&Clear™ Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- Corrosion resistant coated evaporator coil.
- Automatic, stainless steel condensate control system.
- Equipped with Energy Efficient Digital Controller featuring visual/audible product protection alarm. Freezers factory preset for -23.3°C (-10°F).
- Technologically advanced ProcuTemp™ provides exterior product temperature display. Displays to a resolution within 1°.
- Energy-Saving, Time-Initiated, Temperature-Terminated Defrost System with Evaporator Fan Motor Delay during Defrost and Fan Motor Interrupt on Door Opening. Features Manual Defrost Override.
- Low Energy Cabinet Mullion Heater prevents frosting.
- Quality, self-lubricating and sealed motors with streamlined air-flow provide quieter yet robust refrigeration.
- Equipped with Digital Thermometer.

### Cabinet:

- Exterior - stainless steel front and sides.
- Interior - NSF approved white aluminum liner with stainless steel covered corner floor.
- Ergonomic raised interior floor.
- Insulation - cabinet and solid doors are foamed-in-place with eco-conscious, polyurethane insulation.
- Heavy duty thread-in leveler legs.

### Doors:

- Stainless steel front with white aluminum interior liner and large grip, recessed handle(s).
- Self-Closing Swing Door features hold-open position, spring-back protection, and door lock, both reversible on-location.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Door lock included is reversible on-location.

### Lighting:



- Auto-Actuated Interior Lighting.

### Storage:

- Three (3) white coated shelves 19 1/2"W x 22 3/4"D (496mm x 578mm) are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.
- Interior accepts typical 18" x 26" (458mm x 661mm) sheet pans.
- NSF-7 compliant for storage and display of open food product.

### Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.

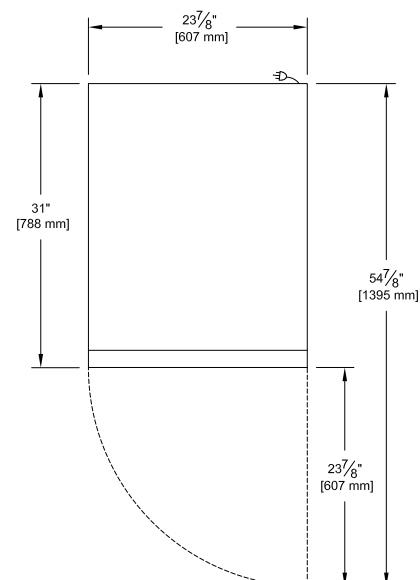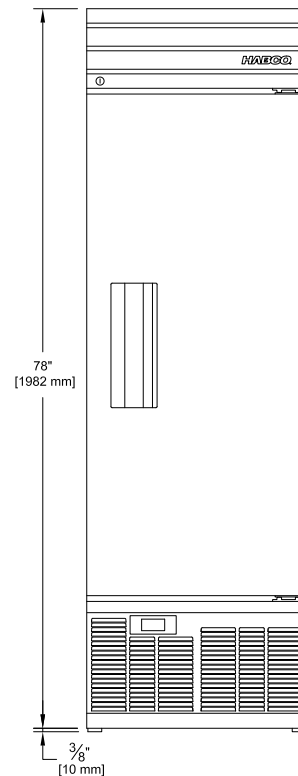

**Special  
Inspection by  
CSA International**



**HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6**  
**Toll Free CAN: 1-800-387-5398 USA: 1-800-448-0244 Fax: 416-491-6982 www.habcomfg.com**