



ICEU070

## Features

- Produces clear, long-lasting large-format cubes.
- Space-saving 15" (386 mm) wide undercounter design.
- Produces up to 84 lbs (38 kg) of ice per day.
- Built in storage bin stores up to 24 lbs (10.9 kg).
- Energy Saving Systems that optimizes cycle efficiency and ice quality, while reducing energy consumption and cutting operating costs.
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic.
- Ideal for any undercounter or bar application.

## Options & Accessories

WATER FILTERS			
Ice Machine Model	Manifold		Inline
	System	Replacement	System
ICEU070	IFQ1	IOMQ (1)	IFI4C / IFI8C

## Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Two years **Parts** and **Labor**.
- Two years **Parts** coverage on the evaporator and compressor.

## Ice Form



GOURMET

SHOT-GLASS STYLE	
W x D x H (in.)	1 x 1 1/8 x 1 1/4
W x D x H (mm)	25 x 29 x 32

## Space-Saving Solutions

- Front air discharge design for compact spaces.
- Low profile top saves counter space.
- Stores up to 24 lbs (10.9 kg) of ice.
- Easy front access to ice.
- Power cord for quick installation.
- Ideal for any under counter or bar application.
- Legs allow for cleaning below.







ICEU070 SELF CONTAINED CUBE ICE MAKER

### Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

- A. 3/4" outer diameter water outlet.
- B. 3/4" hose coupling threaded water inlet or 3/8" male flare (adapter included).
- C. Exhaust air.
- D. Intake air.

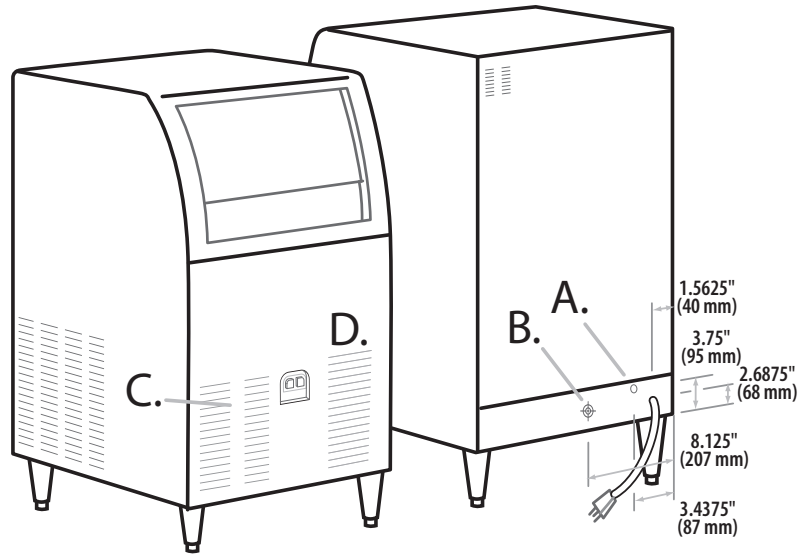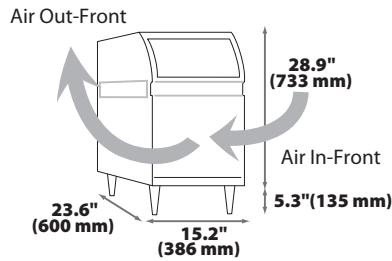

### Operating Requirements

	MINIMUM	MAXIMUM
	<b>60 Hz</b>	
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)
Water Temp.	40°F (4.4°C)	
Water Pressure	14 PSIG (1 BAR)	70 PSIG (5 BAR)

### Dimensions

ALL MODELS	
W x D x H (in.)	15.2 x 23.6 x 34.2
W x D x H (mm)	386 x 600 x 869

### Specifications

Model Number	Cond. Unit	Ice Production per 24hrs		Water Usage gallons per 100 lbs of Ice 90°F air/70°F water	Potable	kWH Used per 100 lbs of ice @ 90°F air/70°F water	Voltage Characteristics	TTL Load Amps	Min/Max Circuit Breaker	Approx. BTUs per hour**
		70°F air/ 50°F water lbs (kg)	90°F air/ 70°F water lbs (kg)							
ICEU070A	Air	84 (38)	66 (30)		37.0	14.50	115/60/1	6	15/15	2,700

\*\*BTUH is calculated 0°F Evaporator, 100°F Condensing, and 33 PSIG.

NOTES:  
 Number of Wires: 3 (including ground)  
 Approx. Shipping Weight lbs (kg): 88 (39.9)  
 Refrigerant Type: R134A  
 Cordset included