


COMMERCIAL

Chest Freezer Solid Top Freezer, 17 cu.ft , 1 Basket

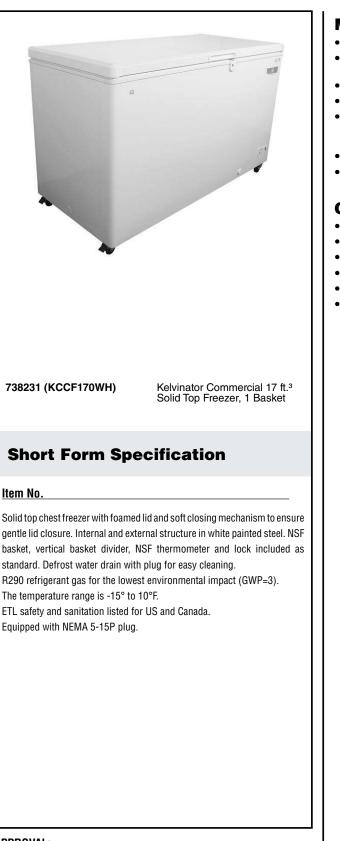

EM #
IODEL #
AME #
IS #
IA #

Main Features

- Temperature range of -15 to +10 F°
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Low energy consumption
- Mechanical control panel with adjustable temperature
- Included as standard 1 NSF® certified temperature gauge and 1 NSF® certified basket (including one vertical divider) durable and reliable for safety in food storage
- Removable rubber bumper guards
- Bottom drain with plug for easy interior cleaning and defrost water discharge

Construction

- · Foamed lid for best insulation and product robustness
- Soft closing lid mechanism
- Static condenser
- Exterior and Interior finish in white painted steel
- Locking lid and key protect the contents of the unit
- Mounted on heavy-duty casters, two locking to keep unit in place but allows position adjusting.

APPROVAL:



D

59 7/16 ' |5|0.4 mm

•

29 3/10" 743 mm

0

47 1/2" |206mm

61

TNG

EI = Electrical connection

6" |52.2mm

1***** 2.5mm

0


36 1/2" 927mm

6

o

Chest Freezer Solid Top Freezer, 17 cu.ft , 1 Basket

Eront	Electric	
	Supply voltage: 738231 (KCCF170WH) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.2 kW USA NEMA 1-15P
	Capacity:	
34 1/14 [•] 865.5mm	Gross capacity:	17.3 cu.feet
∞	Key Information:	
Side	External dimensions, Width: External dimensions, Depth: External dimensions, Height: Condenser type: Automatic Defrost Cooling System: Compressor Horsepower: Freezer baskets (Number/Type): Control Warranty Net weight: Shipping width: Shipping height:	59 1/2" (1511.3 mm) 29 5/16" (744.22 mm) 36 1/2" (927.1 mm) Static No 1/5 1 / Wire Mechanical 1/5 Years 170 lbs (77 kg) 30 1/2" (775 mm) 41 1/32" (1042 mm)
	Shipping weight: Shipping volume:	110 lbs (50 kg) 45.14 ft³ (1.28 m³)
	Refrigeration Data	
Tan	Temperature display location: Temperature range: Refrigerant type:	Internal -15 to 10 °F R290

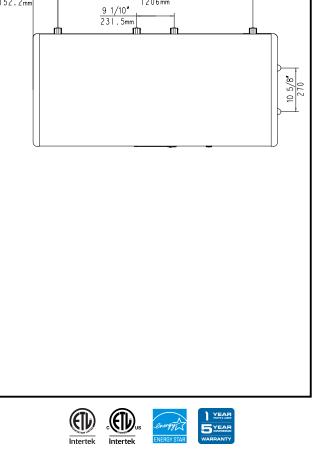

Chest Freezer Solid Top Freezer, 17 cu.ft , 1 Basket

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.