

Project	Quantity	Item #
Model Specified:		CSI Section 11400

Compact Undercounter with Drawers Refrigerator Models/Self-Contained R290

27", 32", 60" & 72" Wide Models



Model UHD60DD-0300



Stainless Exterior,
Anodized Aluminum
Interior

27" Two Drawer Refrigerator
32" Two Drawer Refrigerator
60" Four Drawer Refrigerator
72" Four Drawer Refrigerator

UHD27DO-0300
UHD32DO-0300
UHD60DD-0300
UHD72DD-0300

Traulsen shares your commitment to Corporate Sustainability initiatives and knows that it is more than just meeting the current and future regulatory requirements set by the EPA and DOE. We are committed to reducing global warming potential (GWP) and saving energy consumption while maintaining the performance and quality you have come to expect from Traulsen products.

Traulsen is proud to offer the North American market a broad selection of self-contained reach in and compact undercounter refrigeration with R290, a natural recurring refrigerant with a GWP of (3), the lowest currently available in our industry.

Standard Product Features

- Stainless Steel Exterior Top, Sides & Drawers
- Front Breathing Self-Contained Refrigeration System
- Environmentally Friendly R290 Refrigerant
- Automatic Non-Electric Condensate Evaporator
- Full-Length Drawer Handle with Gasket Guard
- Magnetic Snap-In Drawer Gasket(s)
- Self-Closing Drawers with Stay Open Feature
- 16-Gauge Stainless Steel Drawer with Slide
- 8' Cord & Plug Attached
- Set of Four (4) 4" High Casters (6 For 60" & 72" models)
- Three Year Parts And Labor Warranty
- Five Year Compressor Warranty



Sustainability Features

- SNAP compliant R290 (GWP 3) Refrigerant EPA Rule 20
- All Metal Construction And Long Equipment Life Reduces Pressure On Landfills
- Real World Energy Efficiency Helps Reduce Fossil Fuel Emissions

Optional Accessory Kits*

- **CK20** (four 6" high casters for 27" & 32" models)
- **CK21** (six 6" high casters for 60" & 72" models)
- **CK24** (four 3-1/2" high casters for 27" & 32" models)
- **CK25** (six 3-1/2" high casters for 60" & 72" models)
- **CK28** (four 2-1/2" high casters for 27" & 32" models)
- **CK27** (six 2-3/4" high casters for 60" & 72" models)
- **CU27TOP BSWO** (22 ga. stainless steel top with 4" backsplash UHT27)
- **CU32TOP BSWO** (22 ga. stainless steel top with 4" backsplash UHT32)
- **CU60TOP BSWO** (22 ga. stainless steel top with 4" backsplash UHT60)
- **CU72TOP BSWO** (22 ga. stainless steel top with 4" backsplash UHT72)

*Optional accessory kits shipped separately for field installation.

Factory Installed Options

- Stainless Steel Finished Back
- Other Door Hingings



Intertek



This unit is listed to UL 471, CSA 120 and NSF 7 by an approved NRTL. Consult the factory or unit data plate for approval information.



Approval: _____



TRAULSEN
4401 BLUE MOUND RD.
PHONE 1 (800) 825-8220
Website: www.traulsen.com

FT. WORTH, TX 76106
FAX-MKTG. 1 (817) 624-4302

Project	Quantity	Item #
Model Specified:		CSI Section 11400

Specifications

Construction, Hardware and Insulation

Cabinet exterior front, one piece sides, and drawer faces are constructed of 22 gauge stainless steel.

The cabinet is insulated with an average of 2" thick high density, non-CFC, foamed in place polyurethane.

Refrigeration System-R290

A balanced, rear mounted, front breathing, self-contained refrigeration system using R290 refrigerant is provided. It features a capillary tube metering device, air-cooled hermetic compressor, a forced air evaporator coil and a non-electric condensate evaporator. An 8' cord and plug is provided. Standard operating temperature for refrigerator models is 34 to 38°F.

Drawers

They are constructed using 16 gauge stainless steel drawer slides and 1 5/16" diameter stainless steel rollers. Gasket profile and Santoprene® material simplify cleaning and increase overall gasket life. Drawers include both a self-closing and stay-open feature.

Warranties




Both a three year parts and labor warranty and a five year compressor warranty (self-contained models only) are provided standard.

Cabinet Dimensional Data					
Model	# of 1/6 size pans per drawer	# of drawers per cabinet	# of 1/6 size pans per cabinet	A Width - cabinet	B Width - drawer
UHD27DO-0300	6	2	12	27"	24 5/8"
UHD32DO-0300	8	2	16	32"	29 5/8"
UHD60DD-0300	9 top & 6 bottom	4	30	60"	24 5/8"
UHD72DD-0300	8	4	32	72"	29 5/8"

Electrical & Refrigeration Data			Shipping Data		
115/60/1 R290 NEMA 5-15P			(42"D x 41"H)		
Model	Full Load Amps	BTU/HR - HP	Width - crated	Volume - crated cu. ft.	Weight - lbs.
UHD27DO-0300	7.2	1525 (1/4)	45"	45	250 net/275 gross
UHD32DO-0300	7.2	1525 (1/4)	45"	45	265 net/300 gross
UHD60DD-0300	7.2	1525 (1/4)	69"	69	467 net/500 gross
UHD72DD-0300	7.2	1525 (1/4)	84"	84	560 net/600 gross

NOTES:

- Based on a 90 degree F ambient and 20 degree F evaporator.
- When ordering please specify: voltage, Hinging, Optional Accessories and any additional warranties.
- This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals. Consult factory for other electrical characteristics and agency approvals based on specific electrical and country requirements. (For exact electrical information and approval marks, always refer to the data label of the unit.)
- Continued product development may necessitate specification changes without notice.

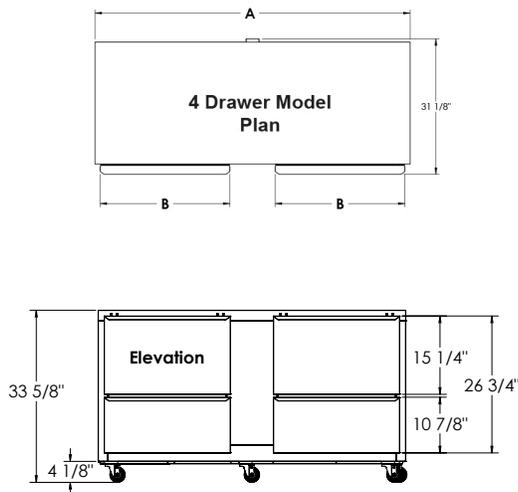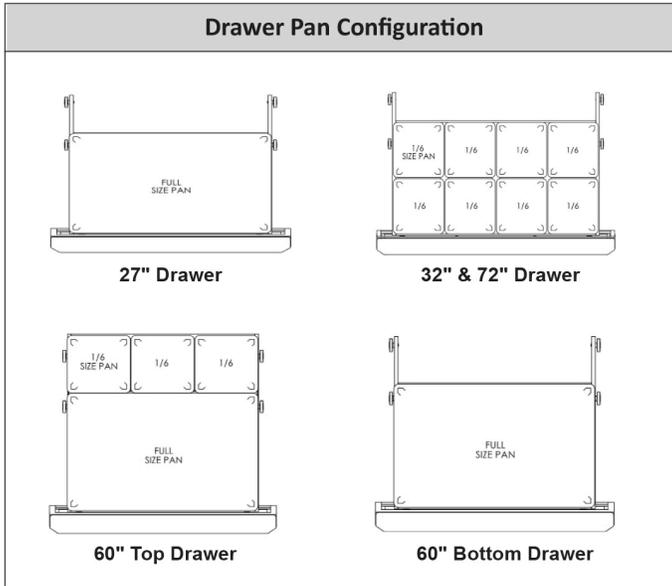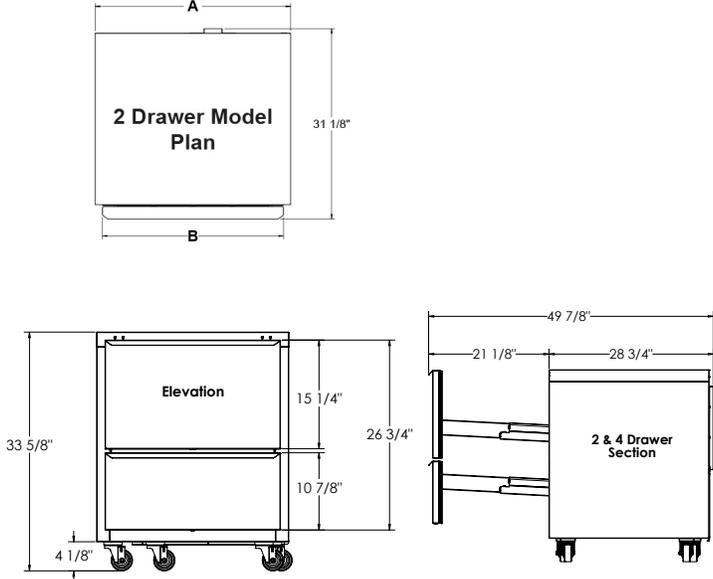

Part No. TR35973 (REV. 09-15-16)

TRAUlsen
4401 BLUE MOUND RD.
PHONE 1 (800) 825-8220
Website: www.traulsen.com

FT. WORTH, TX 76106
FAX-MKTG. 1 (817) 624-4302

