RESTAURANT RANGES

VULCAN

GAS RESTAURANT RANGE 24" WIDE GAS RANGE



Model SX24



SPECIFICATIONS

24" wide SX series light-duty range, Vulcan Model No. SX24-4B. Stainless steel front, sides, backriser, high shelf and bullnose. High temperature burner T knobs with set screw. Porcelain door liner and oven bottom. Four 28,000 BTU/hr. cast top burners with lift-off burner heads. Shrouded flash tube pilot system (one pilot per two burners). 12" x 12" cast top grates with aeration bowls. Heavy duty top grates and burner heads. Compression spring door hinge system for durability. 30,000 BTU/hr. oven measures 20.6"w x 25.5"d x 13.7"h. Thermostat adjusts from 250° to 500°F. One oven rack with four rack positions. 3/4" rear gas connection and gas pressure regulator. Total input: 132,000 BTH/hr.

Exterior Dimensions:

24"w x 32.5"d x 55"h on 6" adjustable legs.

□ SX24-4BN 1 Space Saver Oven / Natural Gas □ SX24-4BP 1 Space Saver Oven / Propane (space saver ovens hold full size bake sheets front to back)

STANDARD FEATURES

- Stainless steel front, sides, backriser, lift-off high shelf.
- 6" Stainless steel adjustable legs.
- 28,000 BTU/hr open top burners with lift-off heads.
- Shrouded flash tube pilot system (one pilot per two burners).
- 12" x 12" cast top grates with aeration bowls.
- 30,000 BTU/hr standard oven cavity measures 20.6"w x 25.5"d x 13.7"h.
- Oven thermostat adjusts from 250° to 500°F.
- One oven rack and four rack positions.
- 3/4" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

ACCESSORIES (Packaged & Sold Separately)

- ☐ Extra oven rack.
- □ Set of four casters (two locking).



GAS RESTAURANT RANGE 24" WIDE GAS RANGE

INSTALLATION INSTRUCTIONS


- 1. A pressure regulator sized for this unit is included. Natural gas 5.0" W.C., propane gas 10.0" W.C.
- Gas line connecting to range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger.
- 3. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.
- 4. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.


Clearances	Rear	Sides
Combustible	6"	10"
Standard Oven Non-combustible	0"	0"
Convection Oven Non-combustible	Min. 4"	0"

6. For proper combustion, install equipment on adjustable legs or casters provided with unit.

NOTE: In line with its policy to continually improve its product, Vulcan reserves the right to change materials and specifications without notice.

> Specify type of gas when ordering. Specify altitude when above 2,000 feet.

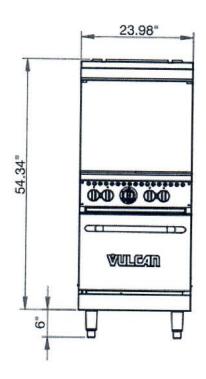

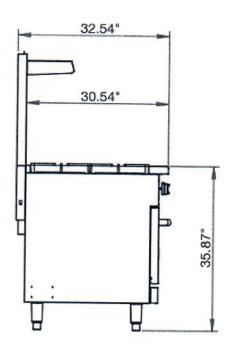

TOP CONFIGURATION	MODEL NUMBER	DESCRIPTION	TOTAL INPUT BTU / HR	SHIPPING WEIGHT LBS / KG
	SX24-4BN	1 Space Saver Oven / 4 Burners / Natural Gas	143,000	350 / 159
	SX24-4BP	1 Space Saver Oven / 4 Burners / Propane	143,000	350 / 159

This appliance is manufactured for commercial use only and is not intended for home use.



a division of ITW Food Equipment Group LLC

105 Gordon Baker Road, Suite 801 Toronto, Ontario M2H 3P8 Toll-free: 1-866-334-2371 Quote & Order Fax: 1-416-496-8112